

Programming Manual

CARDIN S738 TX2 – S738 TX4

Programming of your new remote control:

There are several methods for programming your new remote control.

From a remote control that has already been programmed:



1. Open the casing of your already-programmed remote control.
2. You will see a row of small numbered programmable switches. They are in the ON or OFF position.
3. Open the casing of your new remote control.
4. You will see a row of small numbered programmable switches.
5. Align them in the same way as those presented on the card of your already-programmed remote control.
6. Your new remote control is programmed.

ATTENTION : To program your new remote control from an older model Cardin, you must align the programmable switches in the inverse position (put the ON in the OFF position and the OFF in the ON position).


From the receiver :

1. Open the the casing of your receiver. It is located next to your motor.
2. On the receiver circuit board, you will see a row of small numbered programmable switches. They are in the ON of OFF position.
3. Open the casing of your new remote control.
4. You will see a row of small numbered programmable switches.
5. Align them in the same way as those presented on the card of your receiver.
6. Your new remote control is programmed.


If these methods do not work, retry reversing the positioning of the programmable switches with regard to the receiver or to your already-programmed remote control.

Programming Manual

Coding procedure of the remote control CARDIN as the replacement of a remote control V2:

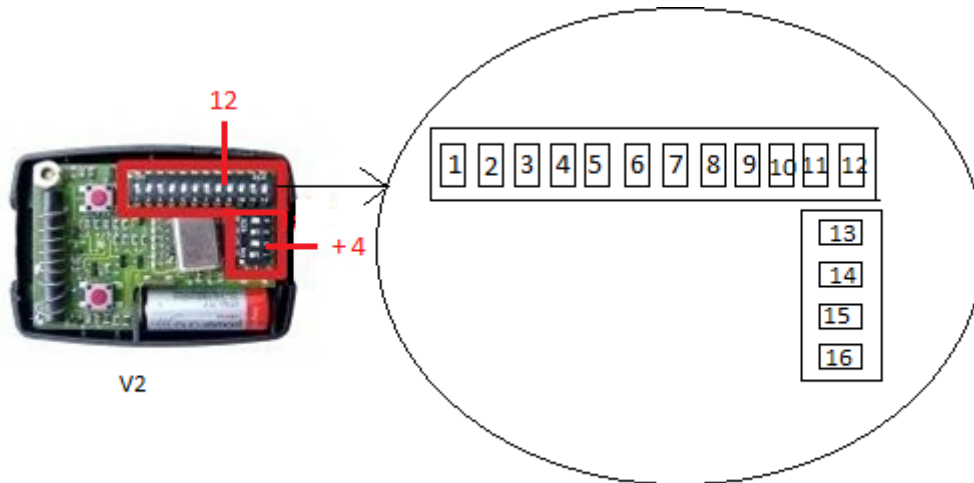

Positioning of the programmable switches of the remote control CARDIN:

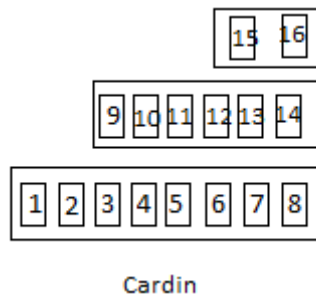

You must put the programmable switches in the inverse position (put the ON in the OFF position and the OFF in the ON position) with regard to your V2 remote control. You must program this way :

- Positioning of the switches number 1 to 8 of the remote control V2 on the switches number 1 to 8 (first row) of the remote control CARDIN
- Positioning of the switches number 9 to 14 of the remote control V2 on the 6 switches of the second row of the remote control CARDIN
- Positioning of the switches 15 and 16 of the remote control V2 on the 2 switches of the third row